

WMC USB

Wonder USB Mains Combo

PRODUCT DESCRIPTION

Mains Power and USB Surge Protection PLUS 2.5Watt USB Multipurpose Charger. For use almost all digital devices that make use of an USB port. Status Indicators:



If the tick light is **ON**, then the surge protector is working and okay, but if it is **OFF**, then surge protector needs to be replaced



WARNING! When the the cross light is **ON**, the the wiring of the wall socket the surge protector is plugged into is faulty

PRODUCT PHOTO



FEATURES AND BENEFITS


- Flame retardant - prevention from burning and causing of a fire
- Guaranteed - You won't need to buy another one in 2 years
- Insured - Your attached equipment is insured against lightning surge damage for 24 months (T&Cs Apply)

PRODUCT TECHNICAL DATA

Specifications	Ratings	Differential Mode	Common Mode
POWER: Input	+/- 220Vac 50Hz (16 or 10A max)		
Is (discharge current)		20kA (8/20µs)	16kA (8/20µs)
ts (Response time)		<25ns	<25ns
USB: Output	USB 2.0 Type A Female		
Power	2.5 Watts		
Output	5V / 500mA		
Temperature Range	-15 to 65 C		
Dimensions	60x70x100mm		
Compliance Standards	SABS IEC 61000-4-5	UL 497B	SABS VC8008 SANS 164-0
Guarantee	Yes, 24 months		
Insured Warranty	Attached Equipment Warranty up to a max of R20 000. T's and C's apply		
Uses	Electrical equipment that plugs into a SA 220Vac 16 Amp round socket outlet. Any digital device that uses a USB port for charging		
Installation	Plug n Play. Simply plug into a standard wall socket, check the lights and connect your devices		

How to connect your plug:

Connect your appliance to the Wonder Mains Combo and the Wonder Mains Combo to the wall socket

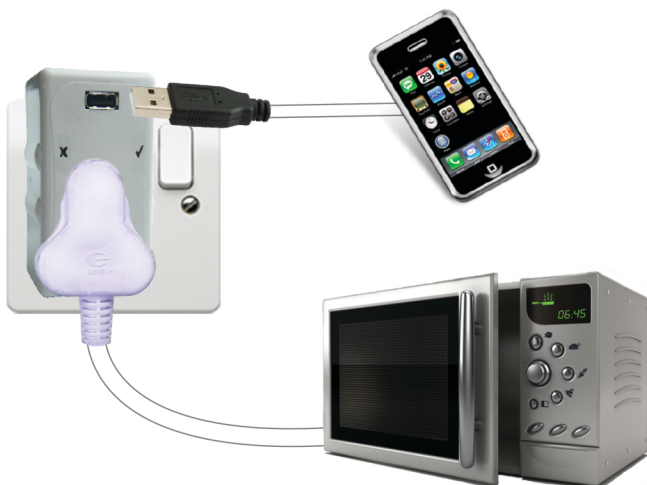

AFRICASURGE
PROTECTION IN FRONT